



Perimeter control

National Pollutant Discharge Elimination System/State Disposal System Permit guidance on the use of perimeter control



Silt fence used as perimeter control

Perimeter control is a method of sediment control best management practices (BMPs) that acts as a barrier to retain sediment on a construction site. Sediment control BMPs are intended to slow and hold flow, filter runoff, and promote the settling of sediment out of runoff, via ponding behind the sediment control BMP.

What is required by the NPDES/SDS Construction Stormwater Permit?

The National Pollutant Discharge Elimination System/State Disposal System (NPDES/SDS) Construction Stormwater Permit (Permit) requires that certain sediment control BMPs are utilized to minimize sediment from leaving a construction site. Some sediment controls, such as ditch checks, may be needed to promote sheet flow and prevent rills and gullies from forming on steeper slopes or ditch bottoms. The Permit also requires additional sediment controls to be utilized at the base of soil piles to contain sediment. Sediment controls located at down gradient boundaries of the construction site are referred to as “perimeter controls”. The location and type of perimeter control BMPs, along with other sediment control BMPs required by the Permit, must be identified in the site’s Stormwater Pollution Prevention Plan (SWPPP).

The perimeter sediment control BMPs must be established on all down gradient perimeters before any up gradient land disturbing activities begin. These BMPs shall remain in place until final stabilization has been established. If the down gradient perimeter controls are overloaded, additional up gradient controls may be necessary to prevent further overloading. The selection of perimeter control BMPs is the permittee’s decision, but it must be effective at keeping sediment on the site. If it is determined through inspection that the selected method is not effective, then the BMP must be upgraded to a method that is effective at keeping sediment on the site.

The timing of the perimeter control installation may be adjusted to accommodate short term activities such as clearing and grubbing, and passage of vehicles. These short term activities must be completed as quickly as possible and the perimeter control BMPs must be reinstalled immediately after the activity is finished. All perimeter control BMPs, however, must be in place before the next precipitation event, even if the activity is not complete. For full details of the Permit requirements, a copy of the NPDES/SDS Permit can be found at www.pca.state.mn.us/water/stormwater/stormwater-c.html.

Types of perimeter sediment control


Silt fence is a commonly known method of perimeter control. However, other types of perimeter controls exist that can be equally or even more effective depending on the construction site circumstances. The following sediment control BMPs are commonly used as perimeter control on construction sites of all sizes:

- ditch checks
- rock logs
- compost berms, logs, and rolls
- biorolls
- sand bags
- vegetated or stabilized soil berms
- geotextile wrapped jersey barriers
- existing vegetation
- silt fence
 - super duty
 - heavy duty
 - preassembled


Planning perimeter sediment control

Perimeter controls should be planned as a system, taking the entire site into consideration and installed prior to any land disturbing activity, and only need to be installed in locations down gradient of the construction. The design of a site's perimeter control system should anticipate ponding that will occur up gradient of the controls and provide sufficient storage and deposition areas and stabilized outlets to prevent flows from over topping the controls. Flows should be strategically directed to specified deposition areas through appropriate positioning of the perimeter controls and site grading. Sometimes additional perimeter controls need to be added or moved to different locations on a project as conditions change. For example, perimeter control is installed above street curbs once the curb and gutter system is installed to keep sediment out of the water conveyance. Some perimeter controls can be relocated as needed, such as biorolls, rock logs, sand bags, and triangular silt dikes. Keeping a vegetated buffer between disturbed areas on a construction site and the down gradient perimeter control BMP can help the BMP perform better and need less maintenance.

Perimeter control BMPs serve no function along ridges or drainage divides where there is little movement of water. Perimeter controls should be installed on the contour of slopes, and the ends of the BMP should bend up slope forming a crescent shape or a "J- hook" rather than a straight line. This will prevent runoff from flowing around the ends of the controls.

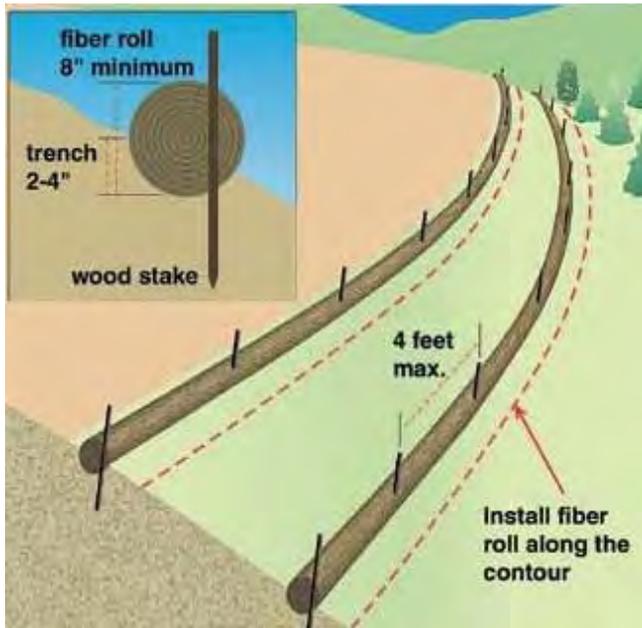

Install biorolls or other sediment controls along the contour of the slope.

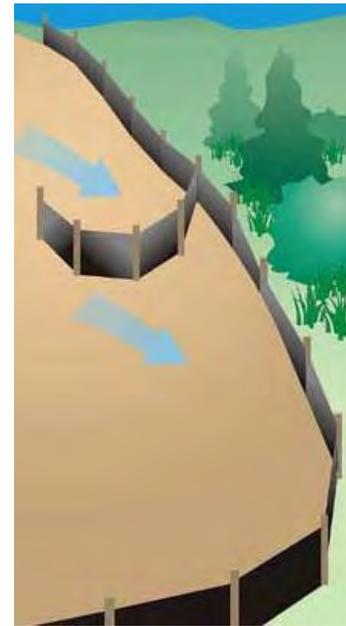

“J-hooked” silt fencing

Maintenance considerations

The NPDES/SDS Permit requires that all BMPs are inspected once every 7 days or within 24 hours of a rainfall event greater than 0.5 inches in 24 hours. All non-functioning BMPs must be replaced, repaired or supplemented with functional BMPs within 24 hours of discovery or as soon as field conditions allow access. Generally, sediment controls must be repaired, replaced, or supplemented when they become nonfunctional, or sediment reaches 1/3 the height of the control.

After the contributing drainage area has been stabilized, all sediment controls and the associated sediment build up must be removed and disposed of properly. Care should be taken to dispose of sediment in a location that is not susceptible to erosion.

Cold weather considerations

It is important to consider winter conditions when planning a perimeter control system. All construction sites must remain in compliance with the NPDES/SDS Permit throughout the winter even if no construction is occurring. It is imperative that properly functioning sediment controls are in place during minor thaws and for the large spring snowmelt to prevent transport of sediment to area surface waters. For this reason, the BMPs must be installed and functional prior to winter freeze up. The BMPs must be inspected and maintained immediately following intermittent snow melt or rainfall that occurs in winter months. If construction resumes during the winter, then the weekly inspection schedule must also resume.

The best way to ensure proper functioning of perimeter controls throughout the winter is to have all sediment controls installed prior to the first freeze. Stakes needed for some sediment control BMPs will be difficult, if not impossible to install into frozen ground. The site’s SWPPP should clearly outline the strategy to prepare the site for the winter months.



If construction is going to continue during the winter and new areas will be disturbed that requires new sediment controls; materials such as compost berms, logs and rolls, fiber rolls, rock bags and rock filters can be installed over the snow cover. These installations will need extra care and frequent inspections to assure continued effectiveness.

Regular maintenance is needed to ensure that a site's perimeter control is functioning properly.

Use of down gradient perimeter sediment control for work in or near open water

It is critical to ensure down gradient perimeter controls are utilized during work on stream banks and lake shores to keep sediment from washing into open water. Sediment discharges resulting from this type of construction can result in enforceable water quality violations.

Sites that include work in public waters permits from the Department of Natural Resources (DNR) that also have coverage under the Minnesota Pollution Control Agency's (MPCA) general construction stormwater permit are required to comply with the conditions in both permits, including the use of down gradient perimeter controls to minimize sediment discharges.

More specialized types of sediment control BMPs may be needed to protect surface waters during construction that extends below the water surface. Whenever possible, work below the Ordinary High Water table (OHW) should be done in a manner that keeps water out of the work area, or separated from flowing water. For example, coffer dams made of sheet piling or other materials to isolate the work from the water or water diversions to divert water around the work area may be the best choices during bridge construction or any work that encroaches into open water.



Coffer dams made of sheet metal to isolate the work area from the surface water.

Biorolls, rock logs, sand bags, triangular silt dikes, geotextile wrapped jersey barriers or stabilized soil berms that can easily be relocated may be best during stream bank restoration work. The perimeter control method may need to change as work changes at the site. Therefore, multiple perimeter control methods may be employed at one site at different times or at the same time.

If the work is conducted on an MPCA designated special water, such as a trout stream or scenic and recreational river segment, redundant BMPs must be employed when an existing 100 foot buffer is encroached. In this case, more

than one method of perimeter control is employed or a super duty perimeter control method may be required to adequately protect the surface water.

Protection of wildlife

Perimeter controls have been known to trap amphibians, reptiles, and small mammals within a construction area. Of concern is the inadvertent harm to rare species. Inspectors of perimeter controls should move rare species out of harms way if they appear trapped or are in imminent danger. If not in danger, they should be left alone. In areas of known rare species populations, silt fence may also be helpful in keeping these animals out the construction area. In all cases it is critical that silt fencing be removed after the area has been re-vegetated. More information on Minnesota's rare species can be found on the DNR website: <http://www.dnr.state.mn.us/ets/index.html>.

Floating curtain is not perimeter control

Frequently, floating silt curtains are employed during work in water. However, it is important to note that floating curtains will not satisfy MPCA's NPDES/SDS Permit requirement for down gradient perimeter control. Even if a floating curtain is utilized, down gradient perimeter control must still be installed between the work and the surface water to prevent sediment from entering the surface water. A nuisance condition (as described in Minn. R. 7050.0210 sub. 2) caused by allowing sediment runoff into the water body is a water quality violation.



Relying on floating curtain as down gradient perimeter control will result in permit violations for failure to install sediment control and in most cases will result in water quality violations.


Floating silt curtain is not designed to prevent sediment from entering surface water. It is designed to help contain suspended sediment within the water column until it has settled to the bottom of the water body. Therefore, floating curtain's only use may be for work that cannot be done outside the water or as a secondary containment to minimize the impact of a water quality violation and keep the damage to the waterbody near the shore and the sediment recoverable.



Use floating silt curtain for work in the water as secondary containment to contain sediment close to the work area.

Proper placement of perimeter sediment controls near water

Perimeter controls need to be installed before upgradient work begins. The perimeter control should be placed at the water's edge during work on the bank or shoreline. If possible, vegetation should be left between disturbed areas and the sediment control BMP. As work is completed on the bank and the bank is fully stabilized, the perimeter controls can be moved upward away from the water's edge above the vegetated or rip rapped areas.

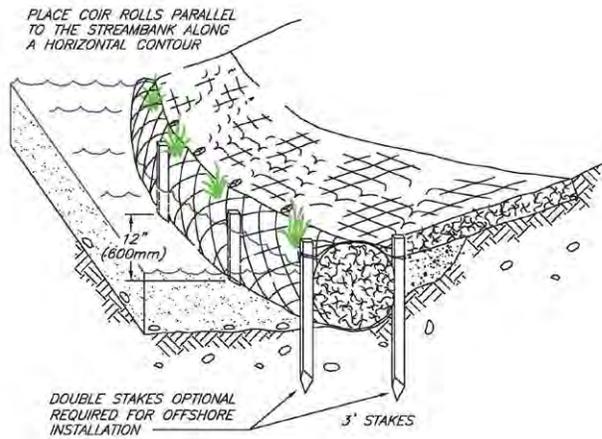

Fiber roll installation at shoreline.



Move perimeter controls up the bank as the bank is stabilized.

Additional resources

Additional information on the use of perimeter controls; including use of floating silt curtain, water diversions, coffer dams and other perimeter control BMPs for work in or near waters as well as all other applications can be found in the *MPCA Protecting Water Quality in Urban Areas – Manual* <http://www.pca.state.mn.us/index.php/view-document.html?gid=7157>.

Minnesota Department of Natural Resources species protection information http://files.dnr.state.mn.us/waters/watermgmt_section/pwpermits/gp_2004_0001_chapter1.pdf.

MPCA Stormwater Construction Inspection Guide <http://www.pca.state.mn.us/publications/wq-strm2-10.pdf>.

USEPA National Pollutant Discharge Elimination System (NPDES) Menu of BMPs –Construction Site Sediment Control – *Silt Fences* <http://cfpub.epa.gov/npdes/stormwater/menuofbmps/index.cfm?action=browse&Rbutton=detail&bmp=56&minmeasure=4>.